

Nibble++ SMD Soldering Challenge



Quantity	Name	Description	Signing/Value
1	BT1	SMD Battery Holder	CR2032
2	C1,C3	0805 capacitor	100 nF
1	C2	0805 capacitor	1 μ F
1	D1	0805 SMD LED	red
1	D2	0603 SMD LED	orange
1	D3	0402 SMD LED	yellow
1	D4	0201 SMD LED	green
1	D5	0201 SMD LED	blue
1	R1	0805 SMD resistor	82 Ω
1	R2	0603 SMD resistor	82 Ω
1	R3	0402 SMD resistor	62 Ω
1	R4	0201 SMD resistor	330 Ω
1	R5	01005 SMD resistor	33 Ω
2	R6, R7	0805 SMD resistor	100 k Ω
1	SW1	SMD Switch	
1	U1	SOIC-8 Timer	NE555
1	U2	SOP-16 Counter	CD4017
1	Board		

Difficulty: ●●●●●● Build-Time: 1–2 Hours

Manual v2.0  CC BY-SA 4.0 Binary Kitchen e.V.

Board v1.1  CC BY-SA 4.0 Binary Kitchen e.V.

Safety Information

- ATTENTION: Not suitable for children under 3 years, choking hazard due to small parts that may be swallowed.
- We recommend: Supervision of the assembly and soldering process by an adult.
- Keep these operating instructions in a safe place for later use! It contains important information.
- If the battery is empty, replace it only with a new battery with the same values.
- When soldering, the soldering iron, the solder and also the components being soldered become very hot.
- Always wear safety glasses when soldering and assembling the kit.
- Always use a fire proof soldering pad when soldering! This prevents the components from slipping away.
- To keep the soldering iron safe during assembly, always use a suitable soldering stand.
- The kit is designed for battery operation only.
- CAUTION: Never connect the kit to 230 V mains voltage! There is an absolute danger to life!
- Please take the device to appropriately certified disposal companies at the end of its service life. This is good for the environment and ensures correct disposal.
- Subject to changes and errors.

Disposal

This appliance is labelled in accordance with the European Directive 2012/19/EU on waste electrical and electronic equipment (WEEE). The directive provides the legal framework for the take-back and recycling of waste equipment throughout the EU.


- **packaging:** The packaging is made of environmentally friendly materials and is therefore recyclable. Dispose of packaging materials that are no longer needed accordingly.
- **waste equipment:** Old appliances often still contain valuable materials. Therefore, hand in your old appliance to your retailer or a recycling centre for reuse. Please ask your retailer or your local authority for the current disposal routes.

blinkyparts.com
Egerstr. 9
93057 Regensburg
GERMANY





Step 1

- a) Hint: Resistors do not have a direction
- b) Capacitors are marked with colours (direction does not matter)
- c) LEDs DO HAVE a direction!
- d) Solder resistors R1 - R5 on the front-side

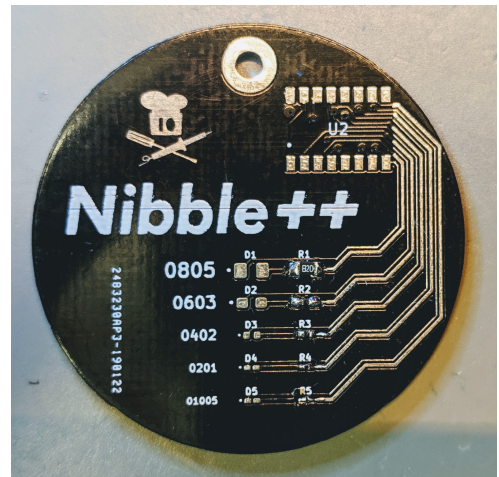


Step 2

- a) Careful: LEDs do have a direction! First read this part completely
- b) Solder D1 - D5 to the board
- c) The LED has a green marking on the back side
- d) A dot is printed onto the board
- e) The dot shows the direction where the green marking has to be directed while soldering

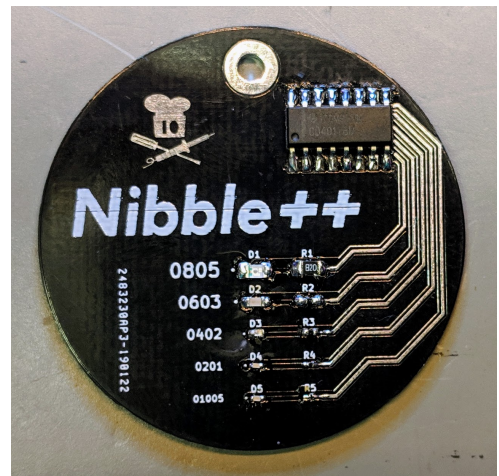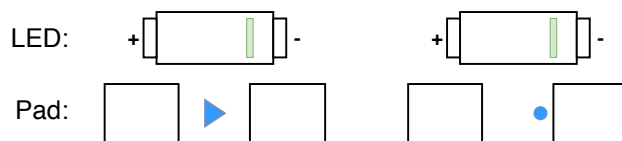


Step 3

- a) Solder CD4017 to the front-side
- b) Direction is marked with a white dot

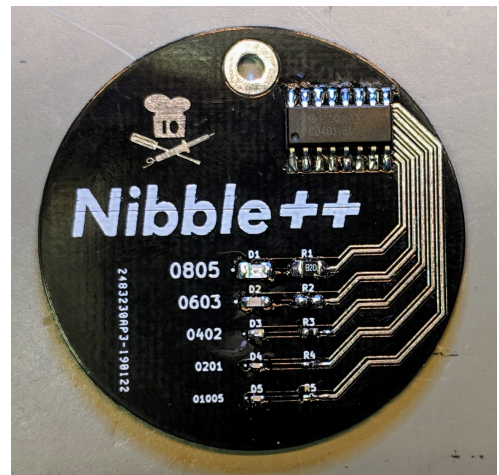


Step 4

- a) Solder C1 - C3 to the back-side of the board
- b) Direction is not important

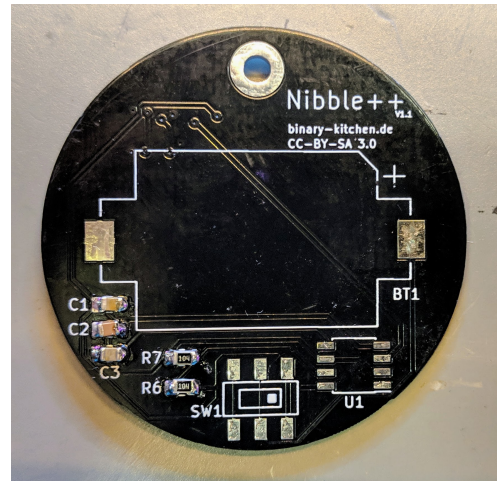


Step 5

- a) Solder R6 and R7 to the back-side of the board
- b) Direction is not important

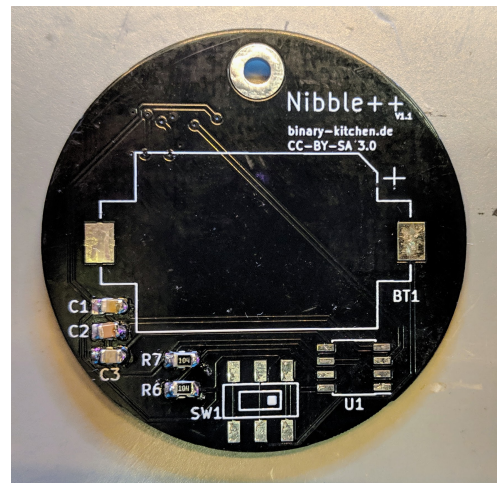


Step 6

- a) Solder U1 (NE555) to the back-side of the board
- b) The longer white line (bottom right) on the board marks the direction

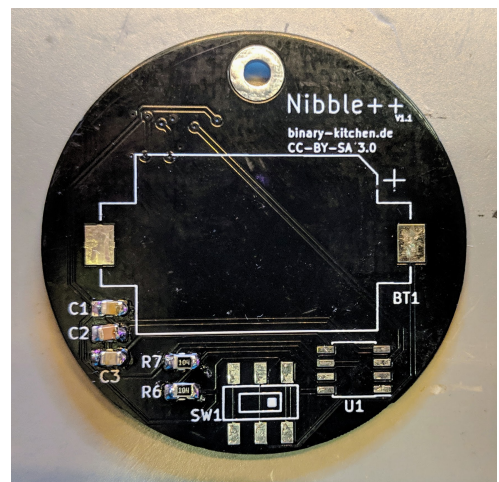

Step 7

- a) Solder the switch SW1 to the board back-side

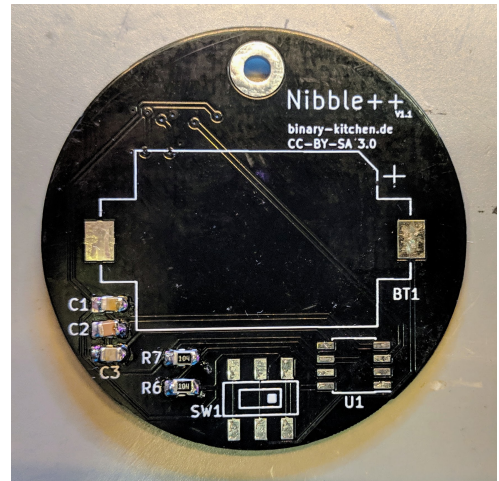

Step 8

- a) Solder battery-holder BT1 to the back-side of the board
- b) Insert a battery
- c) All LEDs should glow
- d) You are finished!

